



ZERO MAGNETIC FRAME SEALS

Sizes: 914mm (3 ft), 1219mm (4 ft), 1829mm (6 ft), 2134mm (7 ft), 3048mm (10 ft). Other sizes available to order, maximum 3048mm.
 Finishes: A=mill aluminium, AA=clear anodised silver, B=self colour brass (aka US bronze), D=dark bronze anodised and G=gold anodised where indicated.
 Availability: usually ex-stock except items marked with an asterisk, which are to special order (2-3 weeks) depending on quantity.

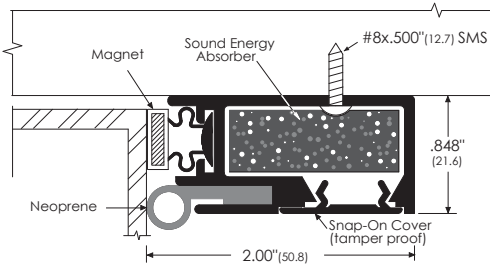


3708AA

Concealed fixing magnetic frame seal included in acoustic tests up to 53 STC. With snap on cover.
 3708AA Anodised aluminium



370A


Surface fixing magnetic frame seal. For use with steel doors or timber doors with steel strip. Available D finish to order at extra cost.
 370A Mill aluminium



375AA


Concealed fixing magnetic frame seal. For use with steel doors or timber doors with steel strip. Available D finish to order at extra cost.
 375AA Anodised aluminium

ZERO FRAME SEAL BRACKETS



770SPB

Strike plate bracket. Optional angle mounting bracket for 170, 770 and 7770 frame seals to accommodate door closer brackets or panic bolt fittings. 152mm long.
 770SPB Grey primed steel

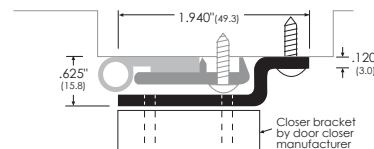

328SPB

Strike plate bracket. Optional angle mounting bracket for 328 as shown and 475 frame seals to accommodate door closer brackets or panic bolt fittings. 152mm long.
 328SPB Grey primed steel